

Clear Acrylic U Shape Barrier Shield (w/ Flexible Connectors)


ASSEMBLY INSTRUCTIONS

READ ALL INSTRUCTIONS BEFORE YOU BEGIN. DO NOT JUMP AHEAD OF ANY STEP.


PARTS LIST:



Flexible Connector
(6 pcs)

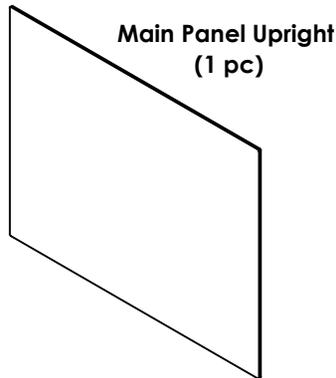

Main Panel Upright
(1 pc)

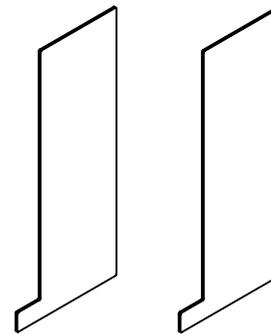


Side Panel Upright (2 pcs)

*NO TOOLS REQUIRED


*TWO PERSON ASSEMBLY RECOMMENDED

STEP 1: Peel off the protective plastic film from both sides of Main Panel Upright & Side Panel Uprights.


STEP 2: Stand up one of the Side Panel Uprights and push one of the Flexible Connectors onto the front of the Side Panel Upright.

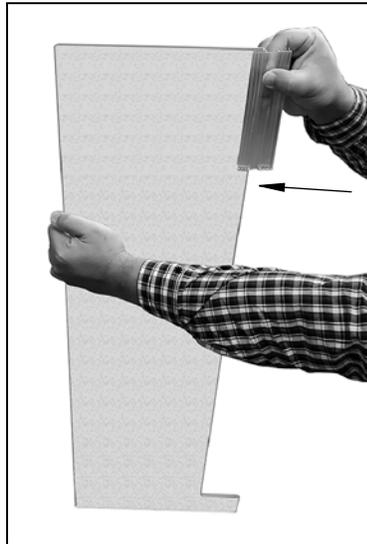

STEP 3: Push the two other Flexible Connectors onto Side Panel Upright, spacing them out to the desired distance. Make sure all Flexible Connectors are installed the same way.

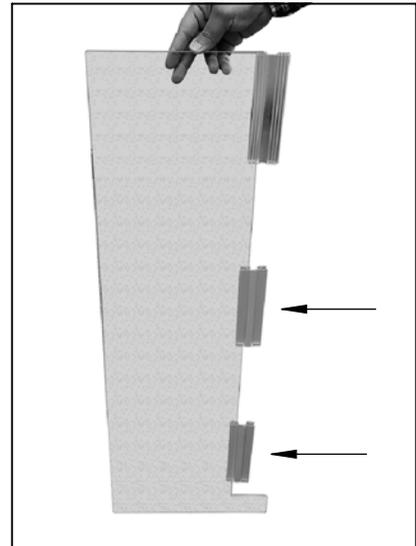

STEP 4: Repeat STEPS 2 & 3 for the other Side Panel Upright. The Flexible Connectors should be a mirror image of the connectors installed on the first Side Panel. Refer to close-up images at right for clarity on proper installation direction.


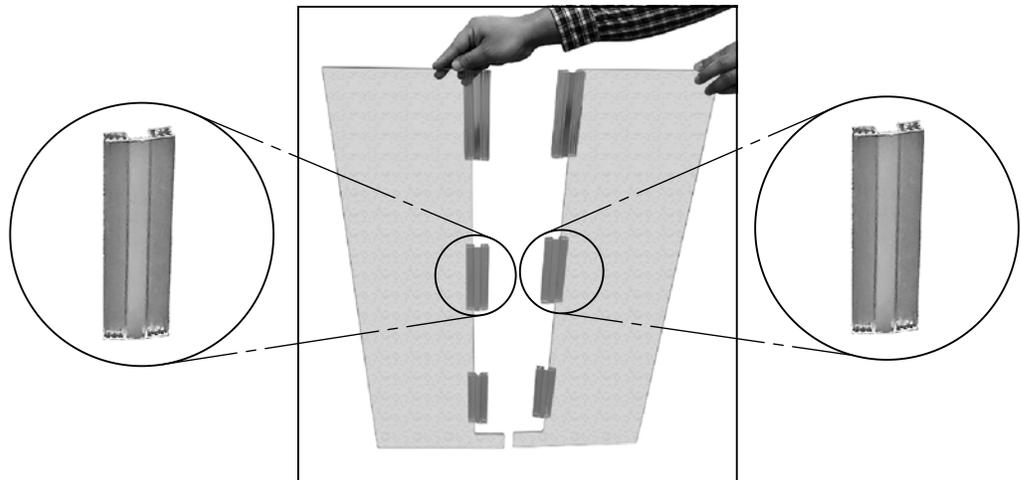


Clear Acrylic U Shape Barrier Shield (w/ Flexible Connectors)

ASSEMBLY INSTRUCTIONS

READ ALL INSTRUCTIONS BEFORE YOU BEGIN. DO NOT JUMP AHEAD OF ANY STEP.

STEP 5: Push the Flexible Connectors from one of the assembled Side Panel Uprights onto one of the sides of the Main Panel Upright. **When connecting panels together, make sure the hinge portion of the Connectors is to the outside as shown in image at right.** Also ensure top edges of the Side Panel Upright and Main Panel Upright are flush with each other.

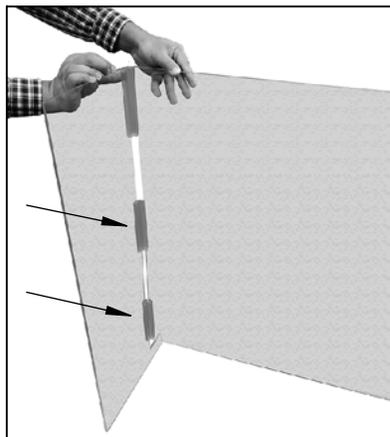


STEP 6: Repeat STEP 5 for the other Side Panel Upright, connecting it to the other side of the Main Panel Upright.

STEP 7: Make sure all of the Flexible Connectors are pushed in and fully engaged with all panels, and the product is rested on a flat surface.

ASSEMBLY COMPLETED



12882 / 12883 / 12886

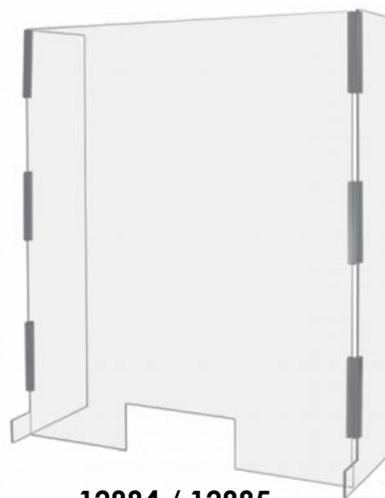

12884 / 12885

NOTE: Side Panels are adjustable up to 125°. The flexible connectors allow Side Panels to be flared out, which increases the Shield width.

